


Fine SDCWSF 125 | Speedcross diamond cup wheels

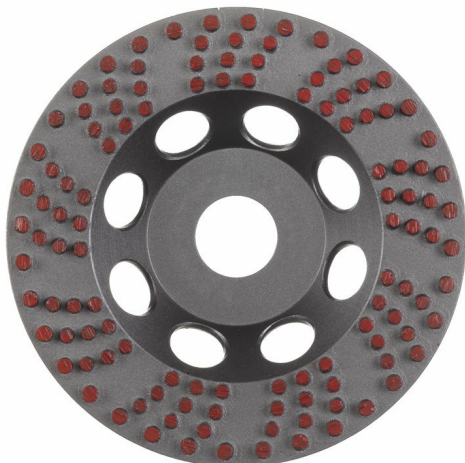

- High quality diamonds and special bonding for low wear and fastest material removal.
- Optimised segment geometry with large dust discharge holes for best performance.
- For levelling of concrete, granite and natural stone surfaces.
- For quick grinding down of thick concrete layers as well as thermoplastics, paints and coatings.
- For edge grinding applications e.g. grinding off high edges of concrete, granite, natural stone tiles.

Acrylic paint and coatings	✓
Article Number	4932479094
Bitumen	✓
Bore size (mm)	22.23
Cup wheel height [mm]	21
Diameter (mm)	125
No. of segments	117
Pack quantity	1
Screed	✓
Segment height (mm)	3.3
Thermoplastic protective paint, glue	✓